


TITLE:	BOOT, AT, 3 WAY, OLUG	DWG NO:	AT3S-BT-XX	REV: A1	SH: 1	OF: 1	

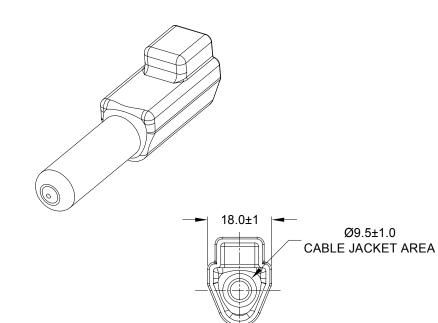



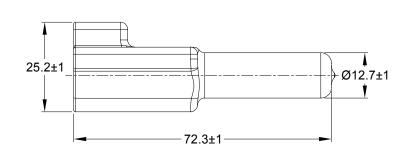

PART NUMBER CHART				
COLOR	PART NUMBER			
GREY	AT3S-BT			
BLACK	AT3S-BT-BK			
YELLOW	AT3S-BT-YW			

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. THIS PART IS USED ON AT06-3S PLUG WITH ANY MODIFICTION THAT DOES NOT INCLUDE AN END CAP.
- 2. TEMPERATURE RATING : -29℃ TO +100℃ [-20°F TO +212°F]
- 3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

	SEE PART N	UMBER CHART	REF: DT3S-BT, DT3S-BT-BK, ST3S-B-YW			
	PART N	NUMBER	DESCRIPTION		ITEM	
QUANTITY		MA	TERI	ALS LIST		
UNLESS OTHERWISE SPECIFIED  1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30   Fractions ±1/64		SIGNATURES DA		Amphonol		
		DRAWN: BROOK.DI	NG 28AUG19	Amphenol		
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED: ORION.L	.I 28AUG19	Sine Systems - www.amphenol-sine.com		
3) Note reference = X  MATERIAL SPECIFICATIONS:  PVC  PROCESS SPECIFICATIONS:  NEXT ASS'Y:		ENGINEER:		44724 Morley Drive		
		APPROVAL: TOMMY.X	IE 28AUG19	Clinton Township, MI 48036		
		CUSTOMER:		BOOT, AT, 3 WAY, PLUG		
		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL		ATOO DT VV		